



# SETTING BIOS

TO SET THE BIOS YOU WILL NEED A COMPUTER KEYBOARD AND A COMPUTER MONITOR.

## WITH THE POWER OFF:



- CONNECT A COMPUTER KEYBOARD TO THE PURPLE CONNECTOR LOCATED UNDER THE MEGA-JAMMA BOARD.
- REMOVE THE 25PIN CONNECTOR FROM THE VIDEO CARD AND PLUG IN THE COMPUTER MONITOR IN ITS PLACE.
- SHORT THE PWR\_BTN (POWER BUTTON) PINS ON THE MOTHERBOARD, AS SHOWN BELOW, RELEASING THE SHORT WHEN THE SYSTEM TURNS ON.

## YELLOW BOARD

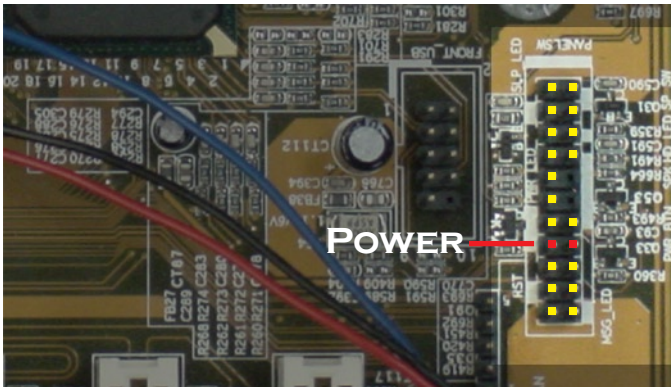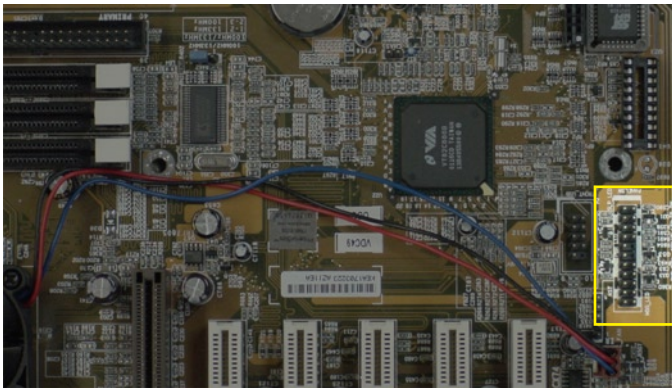

## PWR\_BTN

## RED BOARD

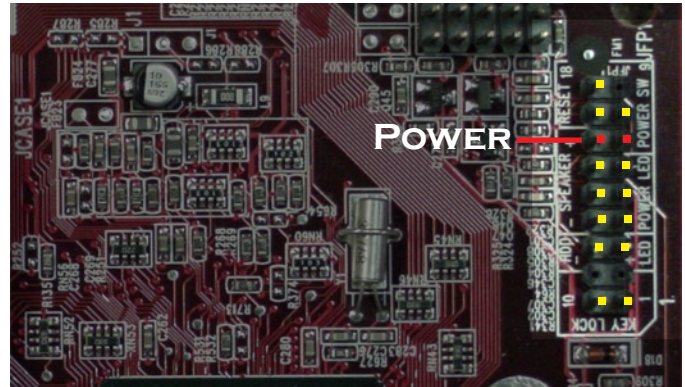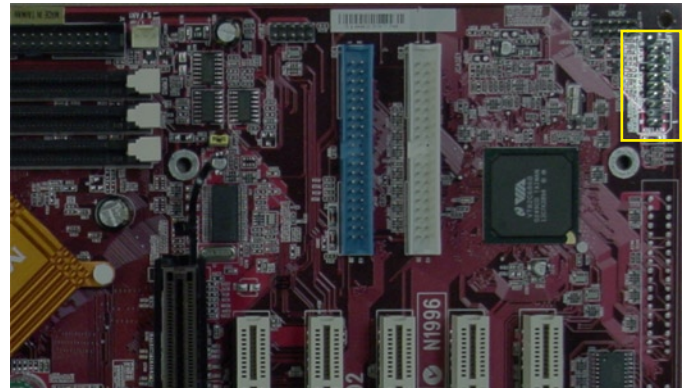

## POWER\_SW

- WHEN THE SYSTEM STARTS TO BOOT PRESS THE DEL KEY REPEATEDLY UNTIL THE BIOS SETUP SCREEN APPEARS ON THE MONITOR.
- USING THE ARROW KEYS SCROLL THROUGH THE MENUS AND SET THE FOLLOWING OPTIONS:

### STANDARD CMOS FEATURES

DRIVE A: NONE  
HALT ON: NO ERRORS

### ADVANCED BIOS FEATURES

ANTI-VIRUS PROTECTION: DISABLED  
FIRST BOOT DEVICE: HDD-0

### INTEGRATED PERIPHERALS

ONBOARD PARALLEL MODE: EPP

### POWER MANAGEMENT SETUP

VIDEO OFF OPTION: ALWAYS ON  
STATE AFTER POWER FAILURE: ON

- WHEN FINISHED SELECT "SAVE AND EXIT SETUP".
- THE SYSTEM WILL REBOOT AND YOUR GAME SHOULD APPEAR ON THE COMPUTER MONITOR.
- AFTER THE GAME APPEARS, TURN THE SYSTEM OFF AND REMOVE THE KEYBOARD AND MONITOR.