




# JAMMA PIN OUT

## COMPONENT SIDE

PIN	Description
1	GND
2	GND
3	+5 VDC
4	+5 VDC
5	No Connection
6	+12 VDC
7	KEY
8	Coin Counter
9	No Connection
10	Speaker Positive (+)
11	Volume Up
12	Video RED
13	Video BLUE
14	Video GND
15	Test
16	Coin 1
17	Player 1 Start
18	Player 1 HCLK
19	Player 1 VDIR
20	Player 1 HDIR
21	Player 1 VCLK
22	Player 1 Fire 1
23	Player 1 Fire 2
24	Player 1 Fire 3
25	No Connection
26	No Connection
27	GND
28	GND

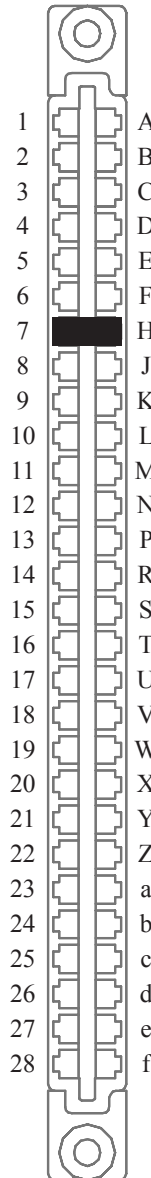


## SOLDER SIDE

PIN	Description
A	GND
B	GND
C	+5 VDC
D	+5 VDC
E	No Connection
F	+12 VDC
H	KEY
J	No Connection
K	No Connection
L	Speaker Negative (-)
M	Volume Down
N	Video GREEN
P	Video SYNC
R	Service
S	No Connection
T	Coin 2
U	Player 2 Start
V	No Connection
W	No Connection
X	No Connection
Y	No Connection
Z	No Connection
a	No Connection
b	No Connection
c	No Connection
d	No Connection
e	GND
f	GND

## TRACKBALL PIN OUT

PIN	Description
1	GND
2	+5 VDC
3	HCLK
4	HDIR
5	VDIR
6	VCLK



TEAM PLAY, Inc.