


# TEAM PLAY GUN KIT JAMMA PIN OUT

## SOLDER SIDE

	Color	Description	PIN
	BLK	GND	A
	BLK	GND	B
	RED	+5 VDC	C
	RED	+5 VDC	D
		No Connection	E
	ORG	+12 VDC	F
		KEY	H
	BRN/GRN	Count 2	J
		No Connection	K
	BRN/BLK	Left Speaker Neg (-)	L
	BLU/BLK	Right Speaker Neg (-)	M
	WHT/GRN	Video GREEN	N
	WHT	Video SYNC	P
	GRY/ORG	Service	R
	GRY/YEL	Tilt	S
	GRY/GRN	Coin 2	T
	GRN	Start 2	U
		No Connection	V
		No Connection	W
		No Connection	X
		No Connection	Y
		No Connection	Z
		No Connection	a
		No Connection	b
		No Connection	c
		No Connection	d
	BLK	GND	e
	BLK	GND	f

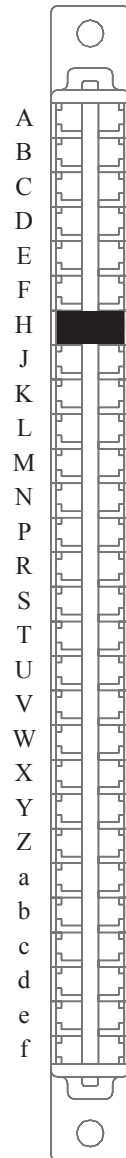

## COMPONENT SIDE

PIN	Description	Color
1	GND	BLK
2	GND	BLK
3	+5 VDC	RED
4	+5 VDC	RED
5	No Connection	
6	+12 VDC	ORG
7	KEY	
8	Count 1	BRN/PUR
9	No Connection	
10	Left Speaker Pos (+)	BRN/RED
11	Right Speaker Pos (+)	BLU/RED
12	Video RED	WHT/RED
13	Video BLUE	WHT/BLU
14	Video GND	WHT/BLK
15	Test	GRY
16	Coin 1	GRY/PUR
17	Start 1	PUR
18	No Connection	
19	No Connection	
20	No Connection	
21	No Connection	
22	No Connection	
23	No Connection	
24	No Connection	
25	No Connection	
26	No Connection	
27	GND	BLK
28	GND	BLK

\*JAMMA VIEW IS FROM WIRE SIDE.

## GUN EXTENSION PIN OUT

PIN	Description	Color
1	Gun 1 +5 VDC	RED/ORG
2	Gun 1 Trigger	WHT/ORG
3	Gun 1 GND	BLK/ORG
4	Gun 1 Signal Input	BLU/ORG
5	Gun 2 +5 VDC	RED/YEL
6	Gun 2 Trigger	WHT/YEL
7	Gun 2 GND	BLK/YEL
8	Gun 2 Signal Input	BLU/YEL

GUN 1 IS CN6, GUN 2 IS CN7